
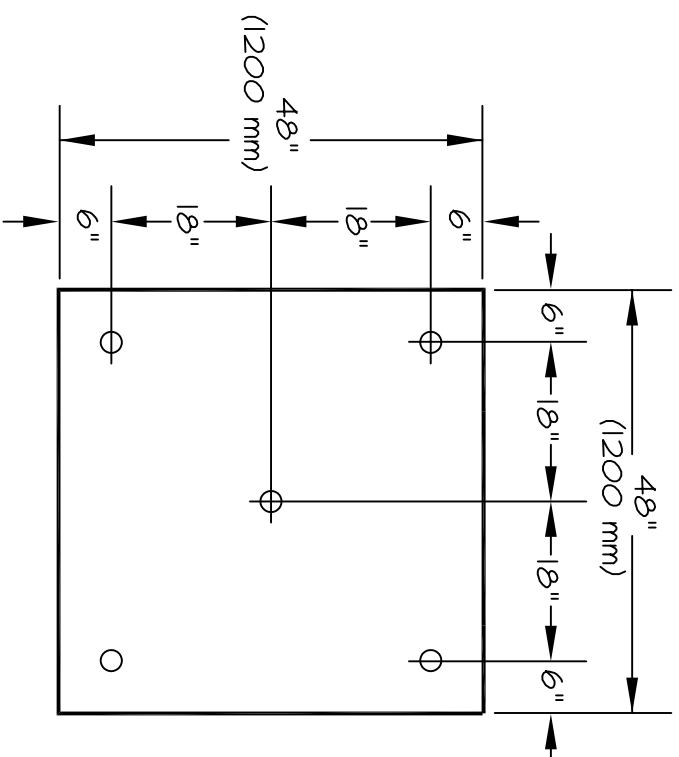


**REROOF/NO TEAR-OFF PROJECTS ONLY -
MAXIMUM ROOF HEIGHT OF 40' (12 000 mm)**

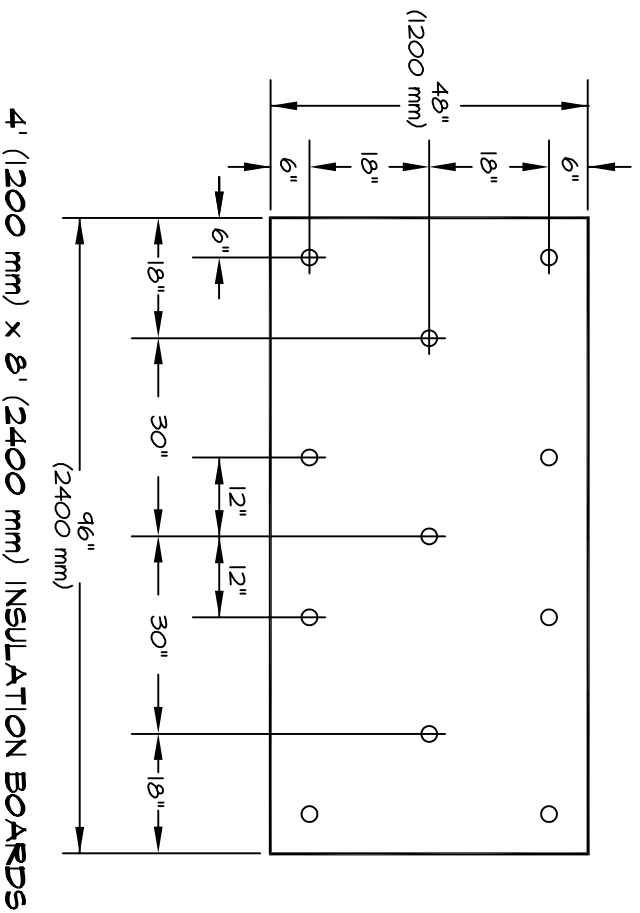

4' (1200 mm) x 4' (1200 mm) INSULATION BOARDS

NOTES:

1. IF A FACTORY MUTUAL (FM) RATING IS REQUIRED, REFER TO CARLISLE'S FLEECEBACK CODE APPROVAL GUIDE FOR FASTENER REQUIREMENTS AND MINIMUM INSULATION THICKNESS.
2. INSULATION ATTACHMENT APPROVED FOR STANDARD 5 OR 10 YEAR WARRANTY AND BASIC WIND SPEED COVERAGE.
3. THIS INSULATION ATTACHMENT IS NOT FOR USE ON CEMENTITIOUS WOOD FIBER OR GYPSUM DECKS.

**FEB-27-D SURE-SEAL INSULATION
FOR REROOF/ NO TEAR-OFF PROJECTS**

