


**FOR USE WHEN FLEECEBACK MEMBRANE IS ADHERED DIRECTLY OVER LIGHTWEIGHT INSULATING CONCRETE (SEE SPECIFICATIONS)**

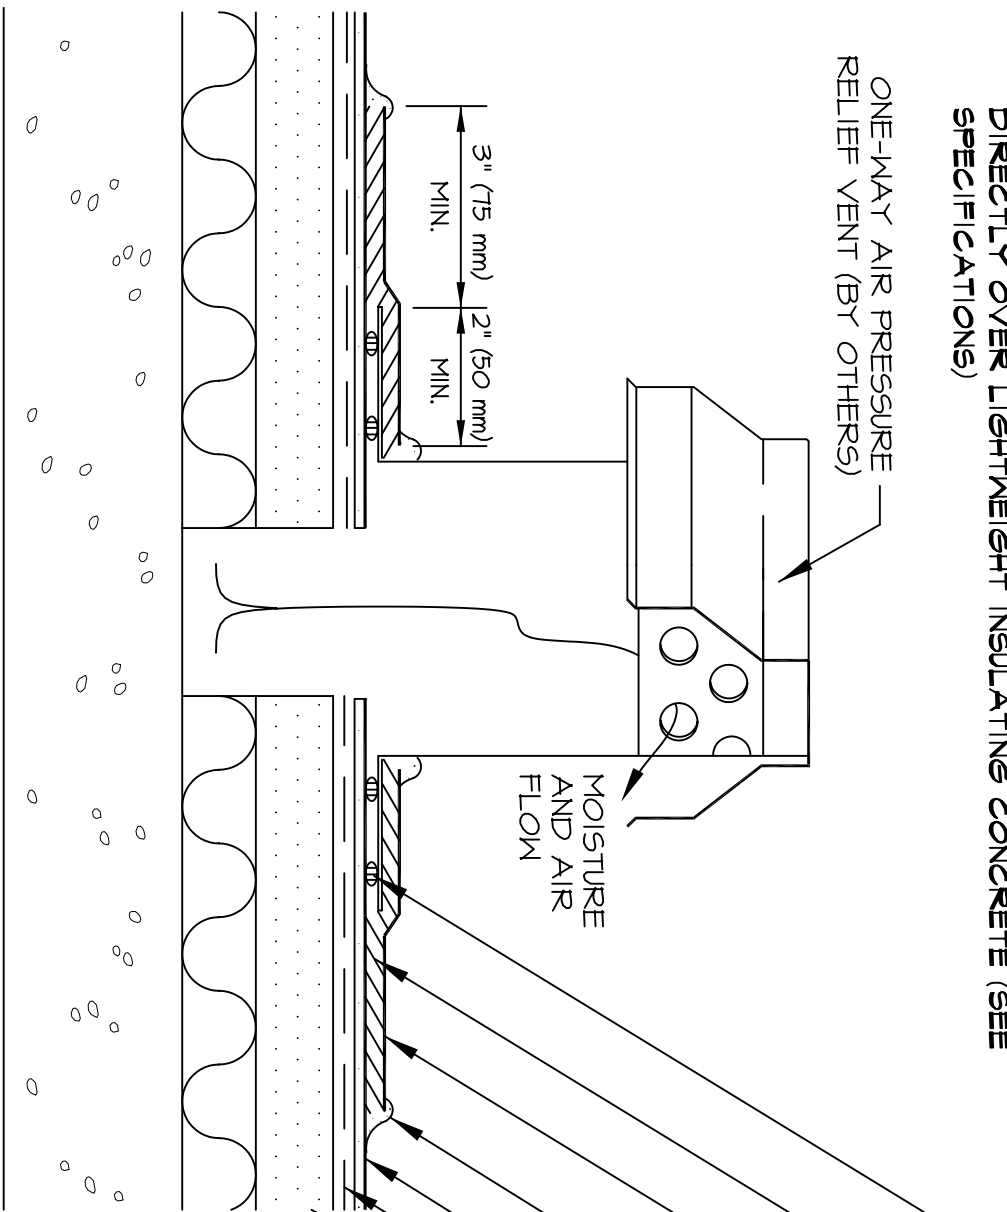

- IN-SEAM SEALANT™ OR LAP SEALANT
- SPLICING CEMENT
- UNCURED ELASTOFORM FLASHING® OR CURED EPDM FLASHING
- LAP SEALANT
- FleeceBACK® MEMBRANE
- SURE-SEAL® FAST™ ADHESIVE
- APPROVED LIGHTWEIGHT INSULATING CONCRETE (MIN. 225 PSI) (16 kg/cm<sup>2</sup>)

**NOTES:**

1. CONTACT CARLISLE FOR ACCEPTABLE PRESSURE RELIEF VENTS.
2. POSITION VENTS AT THE RATE OF ONE EVERY 2000 SQUARE FEET (186 m<sup>2</sup>).

**FB-8  
ONE-WAY AIR PRESSURE RELIEF VENT**

