


CARLISLE'S REQUIRED FASTENING PATTERN FOR SURE-SEAL INSULATION ON 30 YEAR WARRANTY ADHERED ROOFING SYSTEMS.

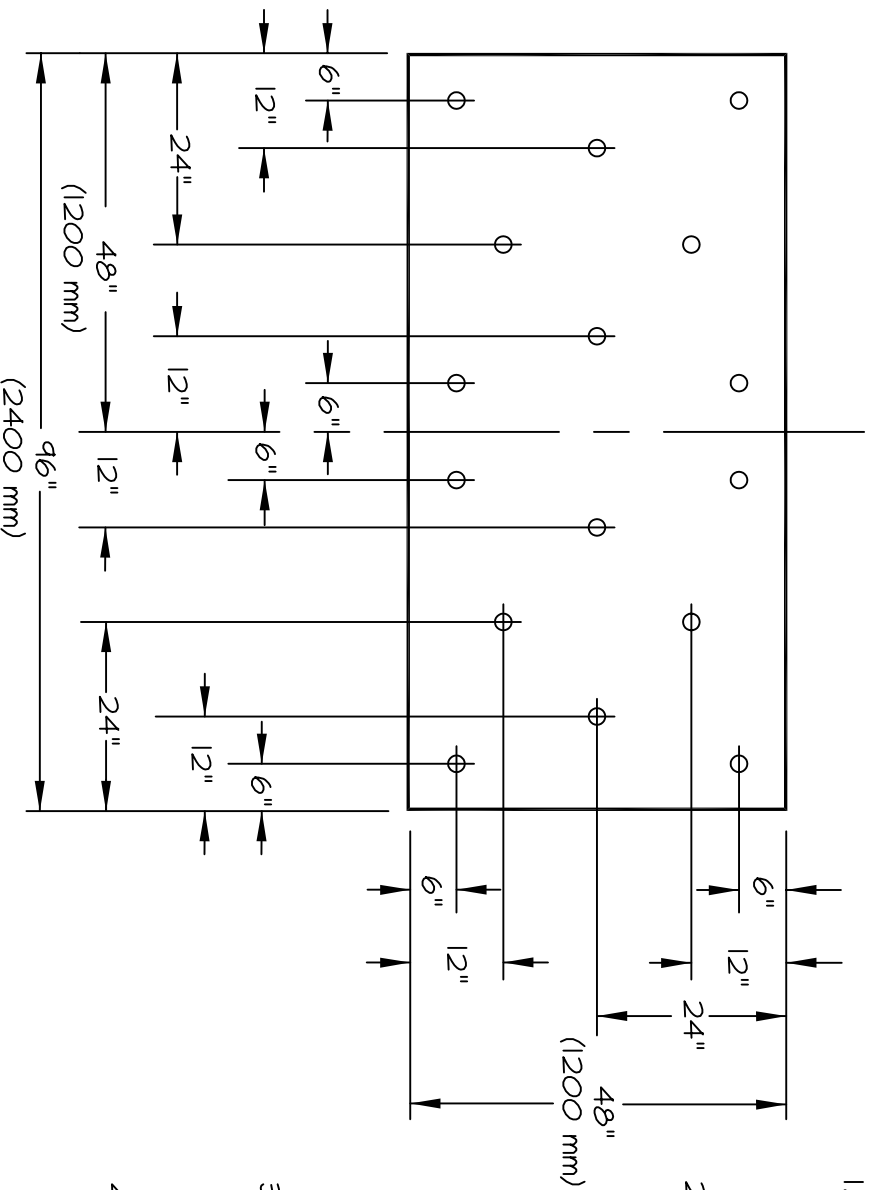

1. THE SAME FASTENING PATTERN CAN BE USED FOR SECUREMENT OF OSB/ POLYISOCYANURATE COMPOSITE BOARD.

2. IF A FACTORY MUTUAL (FM) RATING IS **NOT** REQUIRED, THE FOLLOWING TOLERANCES ON DIMENSIONS BETWEEN FASTENERS ARE PERMITTED.

DIMENSIONS SHOWN ON DRAWING	PERMITTED TOLERANCES
6" (150 mm)	± 1/2" (13 mm)
12" (300 mm)	± 1" (25 mm)
24" (600 mm)	± 2" (50 mm)

3. IF FACTORY MUTUAL (FM) INSURANCE IS REQUIRED, CONTACT FM FOR ANY ENHANCEMENTS THAT MAY BE REQUIRED.

4. FOR CRITERIA ON INSULATION FASTENERS AND PLATES, SEE SPECIFICATIONS.

30-YEAR WARRANTY

X3FB-27A

4' x 8' INSULATION ATTACHMENT

