


CARLISLE'S REQUIRED FASTENING PATTERN FOR ORIENTED STRAND BOARD (OSB) ON 30 YEAR WARRANTY ADHERED ROOFING SYSTEMS

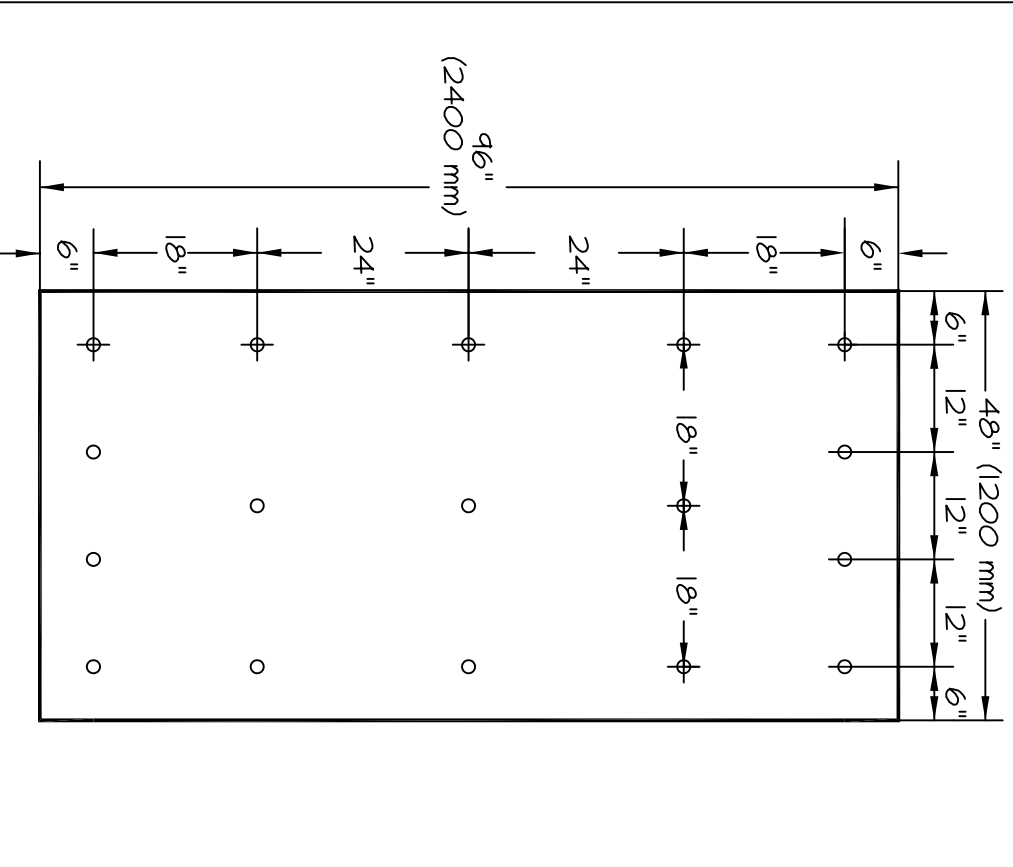

4' (1200 mm) X 8' (2400 mm) ORIENTED STRAND BOARD

- NOTES:
- IF A FACTORY MUTUAL (FM) RATING IS **NOT** REQUIRED, THE FOLLOWING TOLERANCE ON DIMENSIONS BETWEEN FASTENERS ARE PERMITTED.

DIMENSIONS SHOWN ON DRAWING	PERMITTED TOLERANCES
6"	± 1/2" (13 mm)
12"	± 1" (25 mm)
18"	± 1-1/2" (40 mm)
24"	± 2" (50 mm)

- JOINTS IN OSB MUST BE STAGGERED WITH JOINTS IN INSULATION BELOW (IF SPECIFIED).
- OSB MUST BE POSITIONED WITH AN 1/8" (3 mm) GAP BETWEEN BOARDS.
- FOR CRITERIA ON INSULATION FASTENERS AND PLATES, SEE SPECIFICATIONS.

30-YEAR WARRANTY

X3FB-27B

4' X 8' OSB ATTACHMENT

